


**A** Precision 1/1/4" Nom. Swage Press for the production of hose assemblies of all types. Designed specifically for mobile van operation, it is versatile, lightweight / compact design. Manufactured from steels with high alloying components subjected to new surface treatments will provide the owner many years of trouble free operation.



**SOUTHCOTT PTY LTD**  
 A.B.N. 27 007 870 662  
 243 HALIFAX ST,  
 ADELAIDE S.A. 5000

PH. 61 - 8 - 8228 2411  
 FAX. 61 - 8 - 8223 3413

## Features:

- 1 1/4" 4 Wire / 2" 2 Wire Hydraulic hose capability.
- Lightweight design designed for mobile van use.
- **COLOUR SWAGE**
- Swaging accuracy 0.05mm.
- Special reservoir breather for mobile applications.
- SIEMENS control electrics.
- Special "Anti-Pinch" die design.
- Standard swaging range 16 to 55mm diam.  
Extended swaging range 7 to 74mm diam.
- UL and CE approvals



## Specifications:

### Dynamic:

Nom. Size (Hydraulic Hose Size Inches).....	1 1/4
Die Set Size (mm nom.).....	32-XX
Swaging Range (mm with Std. Die Set).....	16 to 55
(mm with Optional Dies).....	7 to 74
Max. Die Set Opening (mm + Die Set Size).....	.25
Radial Swaging Force (kN).....	1500
Cycle Speed (Full Stroke-Complete Cycle sec.).....	.22

### Physical:

Dimensions (Plan mm x mm x Height mm).....	600 x 420 x 570
Weight (Without Dies & Oil kg).....	.68
Shipping Space (m x m x m).....	0.144
Shipping Weight (kg).....	106
Crate Size (Plan m x m x Height m).....	0.72 x 0.55 x 0.78


### Electrical:

Supply (Volts / Amps).....	12 VDC / 200
Power (kW).....	1.5
Control Power ( Volts ).....	12 VDC


### Hydraulic:

Rated Pressure (bar).....	.300
Pump Flowrate (cc/rev).....	1.2
Reservoir Capacity (litres).....	10
Filtration (um).....	100

## Installation:

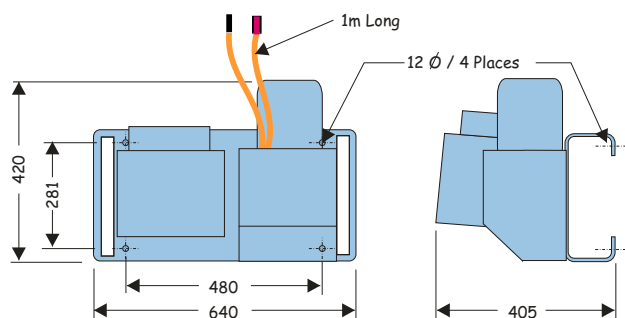

## OPTIONS:



**CS32SDS**  
Standard Die Set



**CS32QCT**  
Quick Change Tool



.....CP  
Corrosion Protection



**CSBK**  
Battery Kit



**CS32QCR**  
Quick Change Rack