


A Precision 1/1/4" Nom. Swage Press for the production of hose assemblies of all types. Designed specifically for mobile van operation, it is versatile, lightweight / compact design. Manufactured from steels with high alloying components subjected to new surface treatments will provide the owner many years of trouble free operation.



SOUTHCOTT PTY LTD
 A.B.N. 27 007 870 662
 243 HALIFAX ST,
 ADELAIDE S.A. 5000

PH. 61 - 8 - 8228 2411
 FAX. 61 - 8 - 8223 3413

Features:

- 1 1/4" 4 Wire / 2" 2 Wire Hydraulic hose capability.
- Lightweight design designed for mobile van use.
- **COLOUR SWAGE**
- Swaging accuracy 0.05mm.
- Special reservoir breather for mobile applications.
- SIEMENS control electrics.
- Special "Anti-Pinch" die design.
- Standard swaging range 16 to 55mm diam.
Extended swaging range 7 to 74mm diam.
- UL and CE approvals



Specifications:

Dynamic:

Nom. Size (Hydraulic Hose Size Inches).....	1 1/4
Die Set Size (mm nom.).....	32-XX
Swaging Range (mm with Std. Die Set).....	16 to 55
(mm with Optional Dies).....	7 to 74
Max. Die Set Opening (mm + Die Set Size).....	25
Radial Swaging Force (kN).....	1500
Cycle Speed (Full Stroke-Complete Cycle sec.).....	22

Physical:

Dimensions (Plan mm x mm x Height mm).....	600 x 420 x 570
Weight (Without Dies & Oil kg).....	68
Shipping Space (m x m x m).....	0.144
Shipping Weight (kg).....	106
Crate Size (Plan m x m x Height m).....	0.72 x 0.55 x 0.78


Electrical:

Supply (Volts / Amps).....	24 VDC / 100
Power (kW).....	1.5
Control Power (Volts).....	24 VDC


Hydraulic:

Rated Pressure (bar).....	300
Pump Flowrate (cc/rev).....	1.2
Reservoir Capacity (litres).....	10
Filtration (um).....	100

Installation:

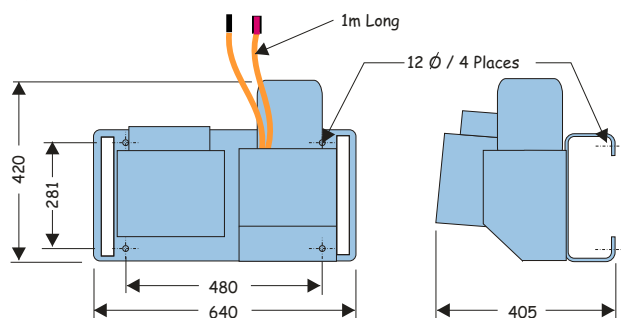

OPTIONS:



CS32SDS
Standard Die Set



CS32QCT
Quick Change Tool



.....CP
Corrosion Protection



CSBK
Battery Kit



CS32QCR
Quick Change Rack