


SOUTHCOTT PTY LTD
 A.B.N. 27 007 870 662
 243 HALIFAX ST,
 ADELAIDE S.A. 5000


PH. 61 - 8 - 8228 2411
 FAX. 61 - 8 - 8223 3413

A Precision 1" Nom. Swage Press for the production of hose assemblies of all types. Designed specifically for mobile van operation, it is versatile, lightweight / compact design. Manufactured from steels with high alloying components subjected to new surface treatments will provide the owner many years of trouble free operation.



Features:

- 1" 4 Wire Hydraulic hose capability.
- Lightweight design designed for mobile van use.
- Cost effective design.
- Swaging accuracy 0.05mm.
- Special reservoir breather for mobile applications.
- SIEMENS control electrics.
- Special "Anti-Pinch" die design.
- Standard swaging range 16 to 45mm diam.
Extended swaging range 7 to 45mm diam.
- UL and CE approvals

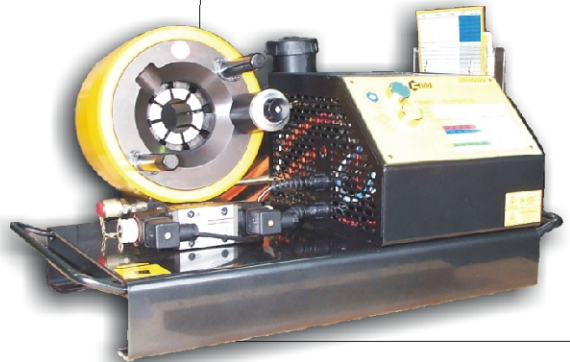

Specifications:

Dynamic:

Nom. Size (Hydraulic Hose Size Inches).....	1
Die Set Size (mm nom.).....	25-XX
Swaging Range (mm with Std. Die Set).....	16 to 45
(mm with Optional Dies).....	7 to 45
Max. Die Set Opening (mm + Die Set Size).....	25
Radial Swaging Force (kN).....	1200
Cycle Speed (Full Stroke-Complete Cycle sec.).....	22

Physical:

Dimensions (Plan mm x mm x Height mm).....	600 x 420 x 570
Weight (Without Dies & Oil kg).....	35
Shipping Space (m x m x m).....	0.144
Shipping Weight (kg).....	106
Crate Size (Plan m x m x Height m).....	0.72 x 0.55 x 0.78


Electrical:

Supply (Volts / Amps).....	12 VDC / 200
Power (kW).....	1.5
Control Power (Volts).....	12 VDC


Hydraulic:

Rated Pressure (bar).....	300
---------------------------	-----

Installation:

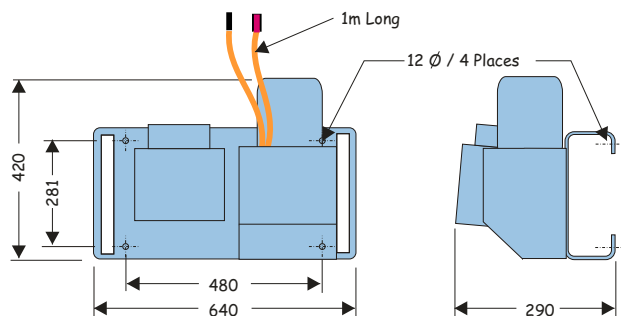

OPTIONS:



CS25SDS
Standard Die Set



CS25QCT
Quick Change Tool



.....**CP**
Corrosion Protection



CSBK
Battery Kit